

FIG. 1 is a block diagram of a system 10 for providing content to a content receiver 16. The system 10 includes a broadcast content source 14, a content transmitter 12, and an encrypted cache 20. The broadcast content source 14 provides content to the content transmitter 12, which transmits the content to the encrypted cache 20. The encrypted cache 20 provides content to the content receiver 16. The content receiver 16 includes a shell 22, a tuner/demodulator 18, and an internet-based entertainment program guide 24. The shell 22 includes a content list with items such as *Games, *Software-4-Rent, and IE&AR. The tuner/demodulator 18 receives content from the encrypted cache 20 and provides it to the internet-based entertainment program guide 24. The internet-based entertainment program guide 24 provides interruption instructions to the tuner/demodulator 18. The system 10 also includes an internet 26, which provides interruption instructions (refresh) to the internet-based entertainment program guide 24.

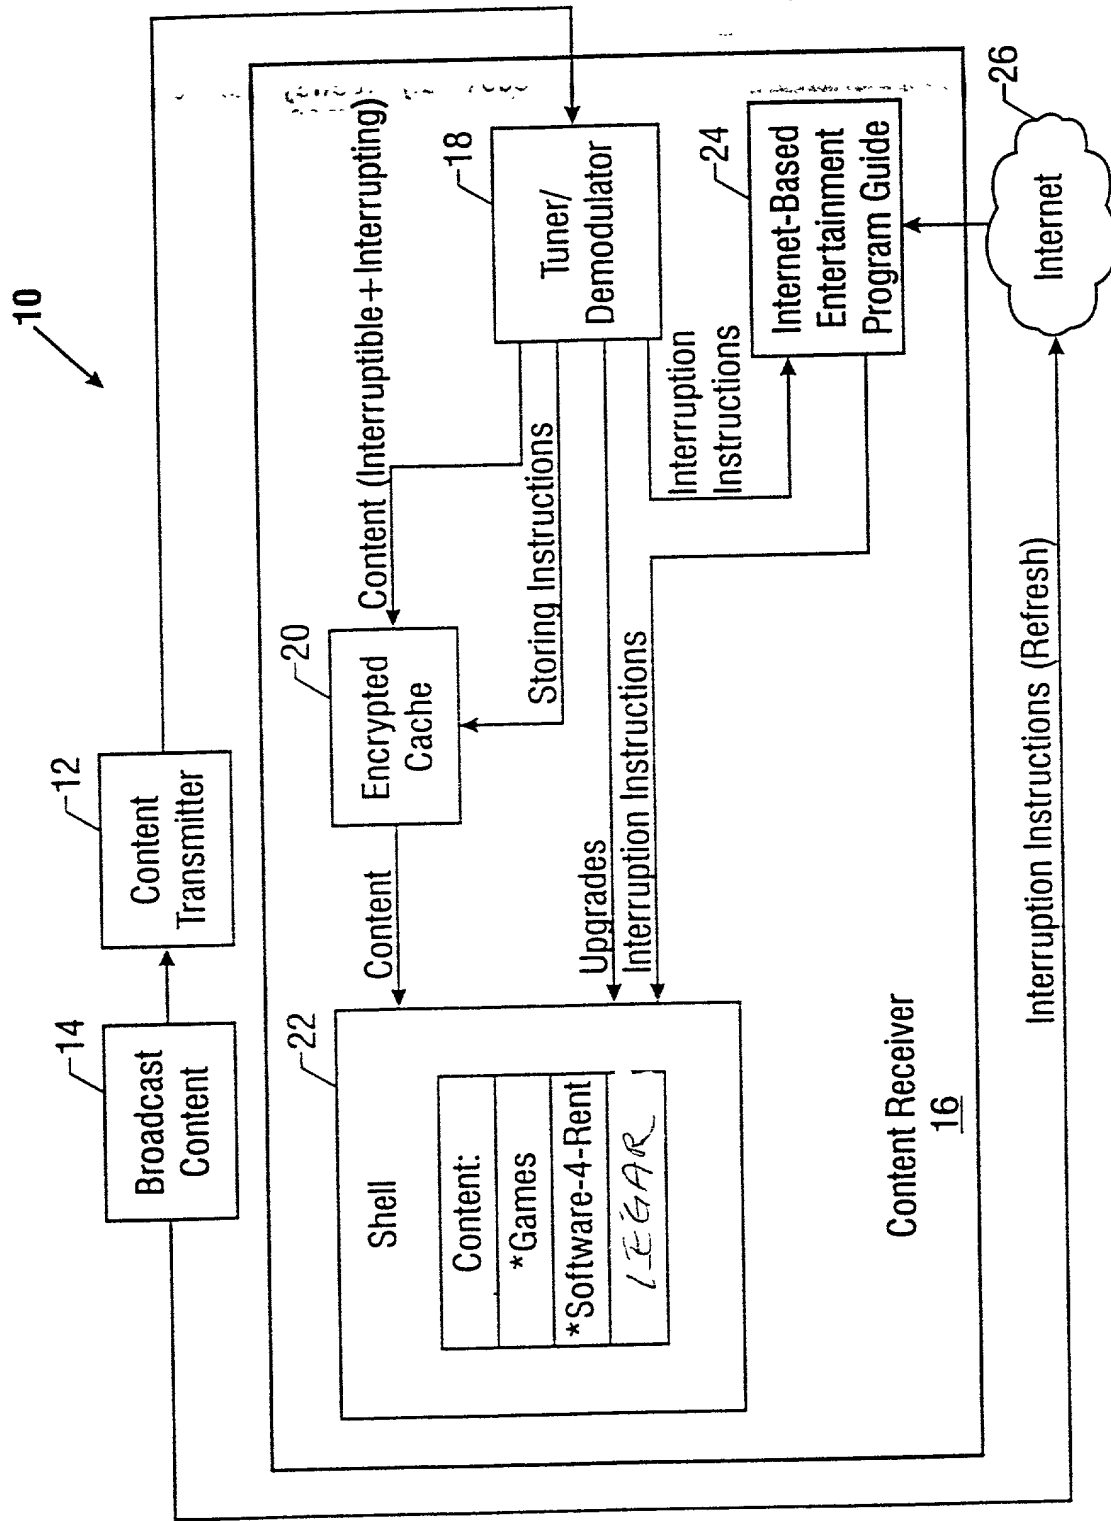


FIG. 1

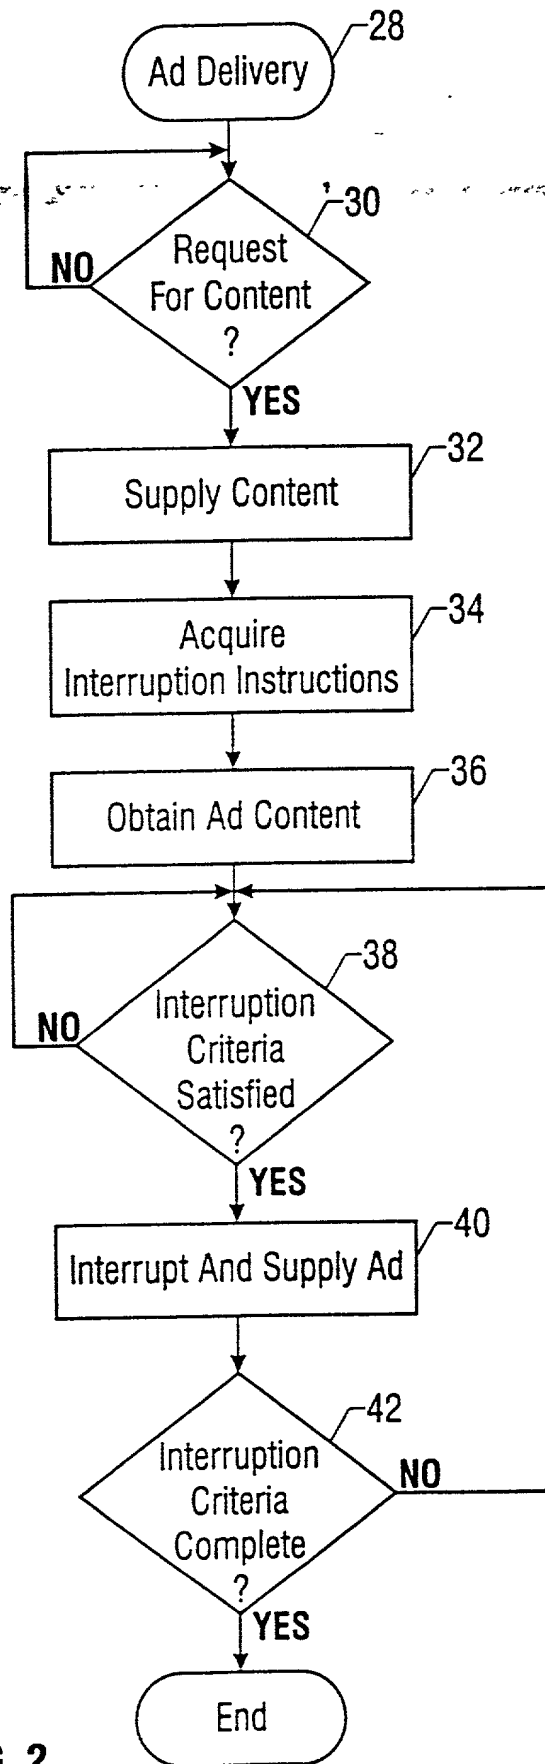


FIG. 2

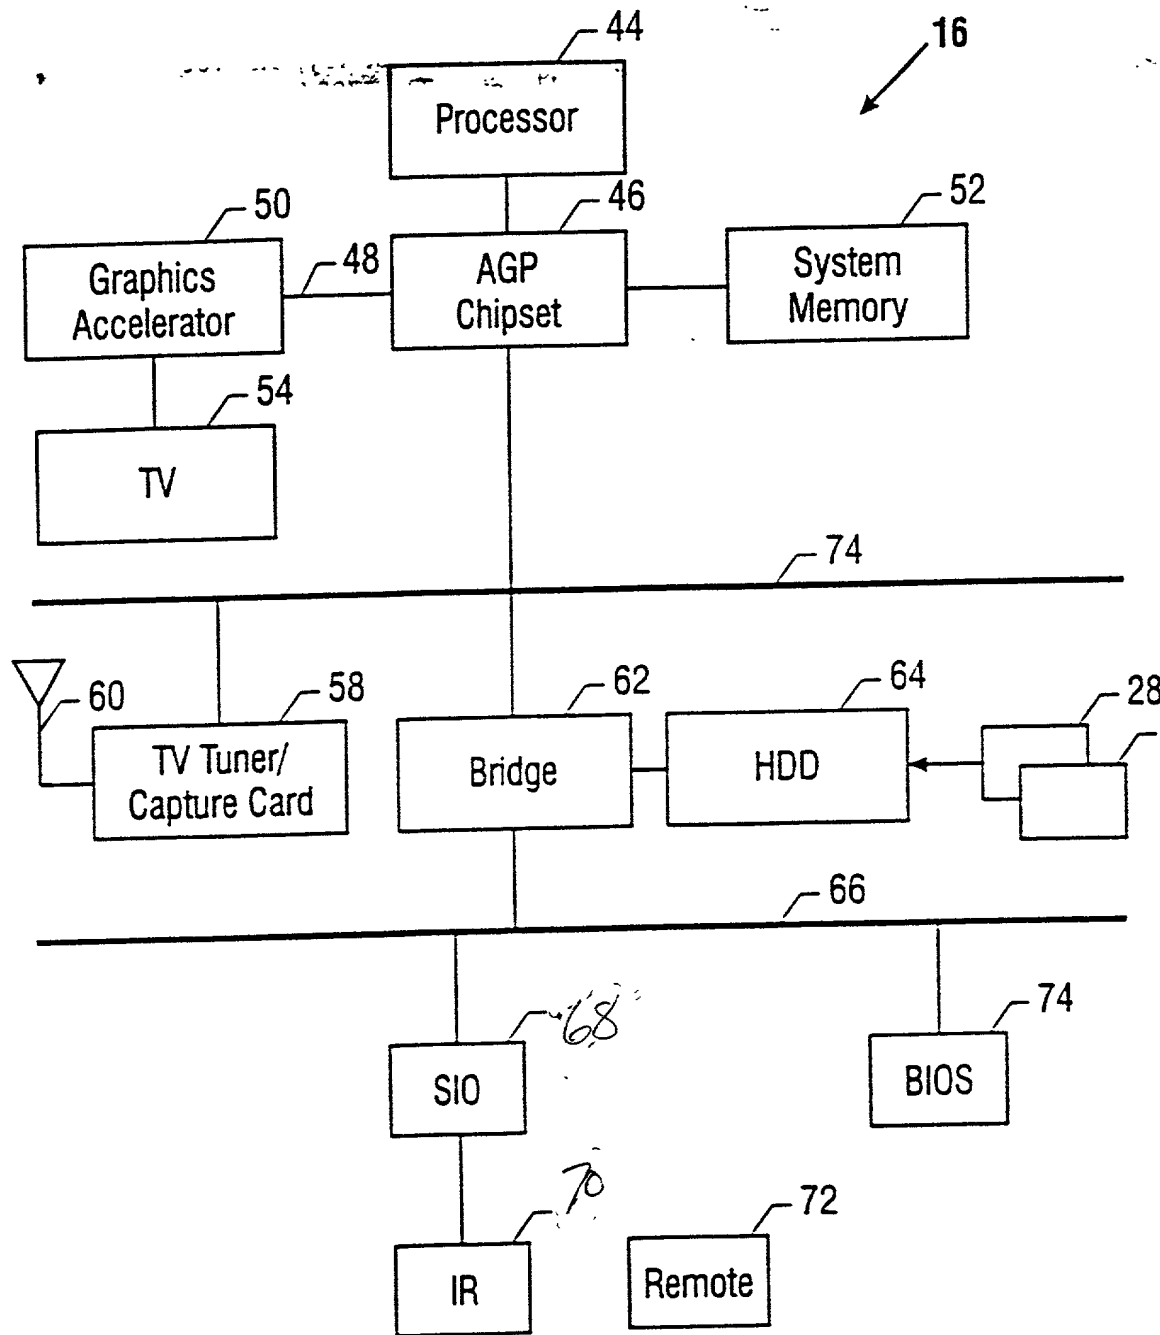


FIG. 3

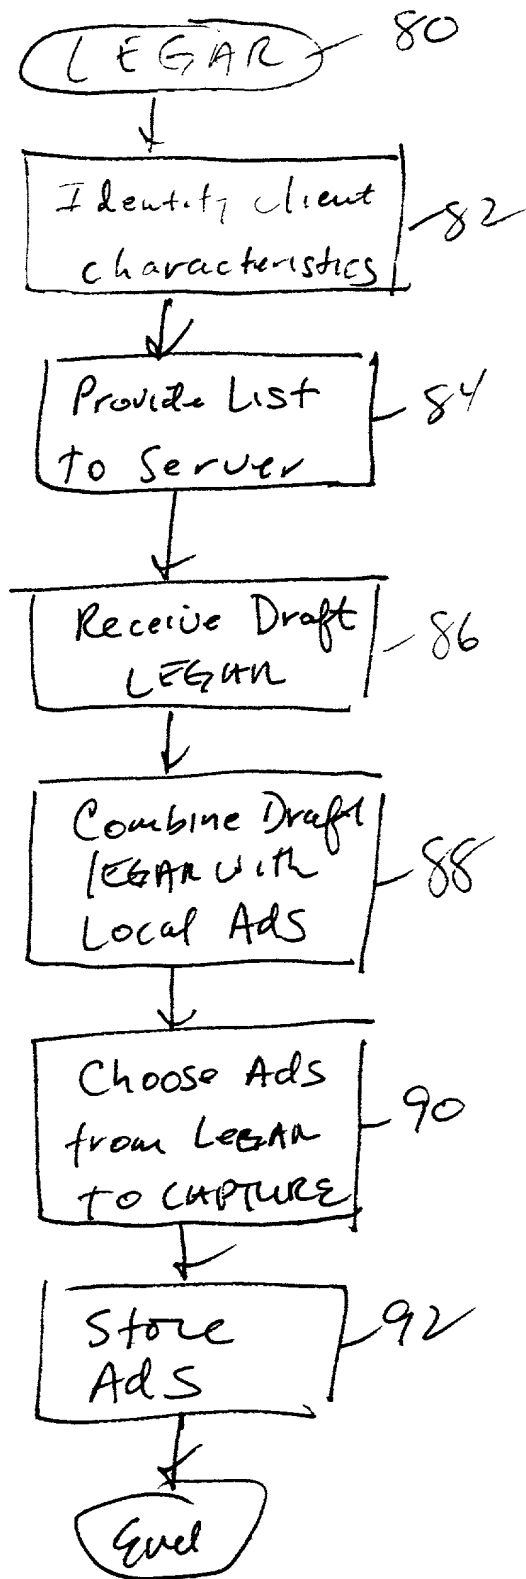


Figure 4